

SC432T-SF6LDF(D0-I30-G6-E5749) Triple collinear omni, 6 dBd, low PIM, PIP rated, 746-869 MHz

- Triple port collinear antenna with 30 dB port-to-port isolation with 6 dBd gain.
- Designed to operate in extreme environmental conditions.
- Low PIM and PIP rated

**Recommend SMK-335-A3 or SMK-335-A7 for Offset Side Mount.
Available from Sinclair separately.**

Sinclair's new line of high isolation multiple port antennas, the SC432's series of collinear, omni-directional antennas are available as a dual (0, 3, and 6 dBd gain), or as a triple antenna (0 or 6 dBd gain), all within the same radome.

All SC432's are enclosed in a rugged, UV protected fiberglass radome designed to withstand severe wind and ice conditions.

Designed for multi-channel systems, it features with low intermodulation products, highly rated average power and peak instantaneous power.

Peak Instantaneous Power (PIP):

PIP produced by in-phase peak powers in a multicarrier system is much higher than a single carrier system. Multipaction and other effects in such a system will cause loss and distortion of the RF signal (increase of noise figure or bit-error-rate) and can damage RF components or subsystems. Sinclair antenna PIP rating is quantified by an indoor antenna and 12 channel combining system at Motorola Campus, Schaumburg. This system provided typical 110 Watts input average power per channel and a combined 575 Watts minimum average power at the antenna input port. At this level, a 25KW PIP is achieved from the calculation.

It is recommended that enough margin should be applied in the system design in order to compensate the effect of the elevation, humidity, temperature and other environment factors to the PIP handling of an antenna.



www.sinctech.com

Region	United States	Europe, Middle East and Africa	Caribbean and Latin America	Canada and rest of the world
Telephone	USA: 1 800 263 3275	International: +44 (0) 1487 84 28 19	International: +1 905 726 7676	Canada: 1 800 263 3275 International: +1 905 727 0165
E-mail	salesusa@sinctech.com	salesuk@sinctech.com	salesla@sinctech.com	salescan@sinctech.com

Electrical Specifications


Frequency Range	MHz	746 to 869
Connector		7/16 DIN-Female
Gain (nominal)	dBi (dBd)	8.1 (6)
Input VSWR (max)		1.5:1
Polarization		vertical
Impedance	Ω	50
Pattern		Omni-directional
Vertical beamwidth (typ)	degrees	12.7
Average Power Input (max)	W	500
Isolation between sections (nom)	dB	30
Passive intermod. (2x20W, 3rd ord.)	dBc	-150
Lightning protection		DC ground
PIP(KW, max)		25
Electrical tilt (available)		0,2,4, or 6 degrees

Notes

*1 : Qty 2

Mechanical Specifications

Width	mm (in)	89 (3.5)
Depth	mm (in)	89 (3.5)
Length/ Height	mm (in)	5448 (214.5)
Base pipe diameter	mm (in)	89 (3.5)
Base pipe mounting length	mm (in)	762 (30)
Radome material		fiberglass (UV protected)
Weight	kg (lbs)	19.52 (43)
Weight iced (1/2" ice)	kg (lbs)	39.5 (87)
Mounting Hardware (Optional)		Clamp006B *1
Actual shipping weight	kg (lbs)	41.77 (92)
Shipping dimensions	mm (in)	6401x152x152 (252x6x6)
Mounting configurations		upright
Recommended For Offset Side Mount:		SMK-335-A3 or SMK-335-A7

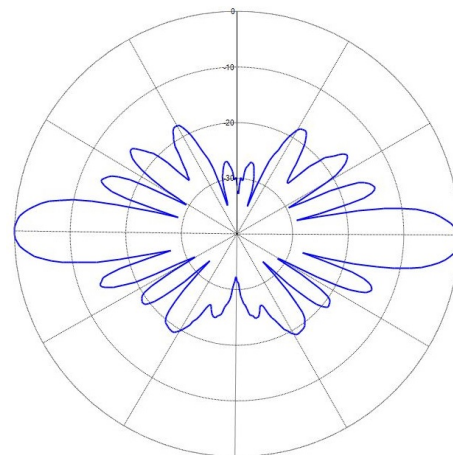

Environmental Specifications

Temperature range	°C (°F)	-40 to +60 (-40 to +140)
Wind Loading Area (Flat Plate Equivalent)	m² (ft²)	0.28 (3.06)
Wind Loading Area (1/2" ice)	m² (ft²)	0.38 (4.05)
Rated wind velocity (no ice)	km/h (mph)	225 (140)
Rated wind velocity (1/2" radial ice)	km/h (mph)	185 (115)
Lateral thrust (100 mph No Ice)	N (lbs)	587.1 (132)
Bending moment (100 mph No Ice)	Nm (ft-lbs)	1327.1 (983)
Tip deflection (100 mph No Ice)	degrees	4.2

Region	United States	Europe, Middle East and Africa	Caribbean and Latin America	Canada and rest of the world
Telephone	USA: 1 800 263 3275	International: +44 (0) 1487 84 28 19	International: +1 905 726 7676	Canada: 1 800 263 3275 International: +1 905 727 0165
E-mail	salesusa@sinctech.com	salesuk@sinctech.com	salesla@sinctech.com	salescan@sinctech.com